

WX 6250 ES



Powermate portable generators range: prompt power assistance to light up, tackle site jobs and property improvement works. A complete range to choose from, for best solution to your remote power needs. When not fixing up around the job site, your Powermate portable generator can be used for emergency power during a power outage.

FEATURES

- Powermate OHV engine provides consistent power for multiple applications
- Fuel: Petrol
- Starting Systems: Electric (with battery)
- Low-oil level shutdown automatically safeguards engine from damage
- Engine oil for the first startup supplied in a bottle
- Digital multi meter tracks engine runtime for maintenance intervals
- Fuel gauge allows user to track gasoline levels
- Practical quick user's Starting Instruction (decal)
- AVR Automatic Voltage Regulator
- Kit wheels integrated for easy transportation



PERFORMANCE

Frequency	Hz	50
Voltage	V	400/230
Phase and connection		3
Max Power	Watts	6000
Rated Power	Watts	5500

Single Phase Power

Voltage	V	230
Single Phase Max Power	Watts	2000
Single Phase Rated Power	Watts	1800



Engine

Brand	Powermate	
Type	OHV	
Operating Speed Nominal	rpm	3000
Fuel	Petrol	
Starting Systems	Electric (+Recoil)	
Oil capacity	l	1.1
Low Oil Shutdown	√	




Alternator

Voltage regulation system	AVR
---------------------------	-----

Dimensional data

Length	(L) mm	800
Width	(W) mm	698
Height	(H) mm	620
Dry weight	Kg	90
Carton box dimension LxWxH	mm	810x625x607

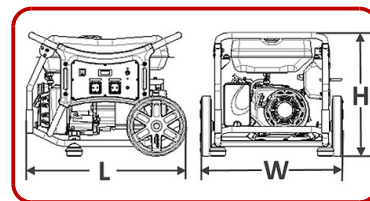

Autonomy

Fuel tank capacity	26	
Fuel consumption @ 75%	l/h	2.47
Running time @ 75%	h	10.5



Noise level

Guaranteed noise level (LWA)	dB(A)	97
Noise pressure level @ 7 mt	dB(A)	69

GENSET CONTROL PANELS

Mounted on the genset and complete of: instrumentation, control, protection of the generating set and sockets.

COMMANDS

- Selector switch: OFF - ON - START

INSTRUMENTATION

- Voltmeter
- Frequency meter
- Hourmeter
- Fuel gauge

PROTECTIONS

- Thermal protection
- Oil Guard

SOCKET TYPE

SCHUKO 230V 16A IP44	2
3P+N+T CEE 400V 16A IP44	1



The information is aligned with the Data file at the time of download. Printed on 23/01/2018 (ID 6426)

©2017 | PR INDUSTRIAL s.r.l. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice